

SABIC®PC Resin PC1000R

Europe-Africa-Middle East: COMMERCIAL

PC1000R resin is a medium-low flow (MFR = 10 at 300°C/1.2kg), heat stabilized, polycarbonate product with mold release designed for use in the general purpose molding market. It is available exclusively at www.sabicpc.com

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	63	MPa	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	6	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	>70	%	ASTM D 638
Tensile Modulus, 50 mm/min	2350	MPa	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	90	MPa	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	2300	MPa	ASTM D 790
Hardness, Rockwell R	120	-	ASTM D 785
Tensile Stress, yield, 50 mm/min	63	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	6	%	ISO 527
Tensile Strain, break, 50 mm/min	>70	%	ISO 527
Tensile Modulus, 1 mm/min	2350	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2300	MPa	ISO 178
Hardness, Rockwell R	120	-	ISO 2039-2
IMPACT			
Izod Impact, unnotched, 23°C	NB	J/m	ASTM D 4812
Izod Impact, notched, 23°C	800	J/m	ASTM D 256
Instrumented Impact Energy @ peak, 23°C	65	J	ASTM D 3763
Izod Impact, unnotched 80*10*3 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*3 -30°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*3 +23°C	70	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	12	kJ/m ²	ISO 180/1A
THERMAL			
Vicat Softening Temp, Rate B/50	143	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm	138	°C	ASTM D 648
HDT, 1.82 MPa, 3.2 mm	127	°C	ASTM D 648
CTE, -40°C to 95°C, flow	7 E-05	1/°C	ASTM E 831

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
4) Own measurement according to UL.
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

Visit www.sabicpc.com for additional information about SABIC® PC resins.

All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2012 SABIC Innovative Plastics Company. All rights reserved

SABIC®PC Resin PC1000R

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
THERMAL			
Thermal Conductivity	0.2	W/m-°C	ASTM C 177
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, 23°C to 80°C, flow	7.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	Passes	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	143	°C	ISO 306
HDT/Bf, 0.45 MPa Flatw 80*10*4 sp=64mm	138	°C	ISO 75/Bf
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	127	°C	ISO 75/Af
PHYSICAL			
Specific Gravity	1.2	-	ASTM D 792
Water Absorption, equilibrium, 23C	0.35	%	ASTM D 570
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.5 - 0.7	%	SABIC Method
Mold Shrinkage, flow, 3.2 mm (5)	0.5 - 0.7	%	SABIC Method
Melt Flow Rate, 300°C/1.2 kgf	10	g/10 min	ASTM D 1238
Density	1.2	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.35	%	ISO 62
Melt Volume Rate, MVR at 300°C/1.2 kg	9	cm ³ /10 min	ISO 1133
OPTICAL			
Light Transmission, 2.54 mm	88 - 90	%	ASTM D 1003
Haze, 2.54 mm	<0.8	%	ASTM D 1003
Refractive Index	1.586	-	ASTM D 542
Refractive Index	1.586	-	ISO 489
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	ASTM D 257
Dielectric Strength, 1.6 mm	27	kV/mm	ASTM D 149
Relative Permittivity, 60 Hz	3	-	ASTM D 150

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.
All properties, except the melt volume rate are measured on injection moulded samples.
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
4) Own measurement according to UL.
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

Visit www.sabicpc.com for additional information about SABIC® PC resins.

All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2012 SABIC Innovative Plastics Company. All rights reserved

SABIC®PC Resin PC1000R

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
ELECTRICAL			
Relative Permittivity, 1 MHz	3	-	ASTM D 150
Dissipation Factor, 60 Hz	0.001	-	ASTM D 150
Dissipation Factor, 1 MHz	0.01	-	ASTM D 150
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Dielectric Strength, 1.6 mm	27	kV/mm	IEC 60243-1
Relative Permittivity, 60 Hz	3	-	IEC 60250
Relative Permittivity, 1 MHz	3	-	IEC 60250
Dissipation Factor, 60 Hz	0.001	-	IEC 60250
Dissipation Factor, 1 MHz	0.01	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94V-2 Flame Class Rating (3)	1.6	mm	UL 94

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.
All properties, except the melt volume rate are measured on injection moulded samples.
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
4) Own measurement according to UL.
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

Visit www.sabicpc.com for additional information about SABIC® PC resins.

All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2012 SABIC Innovative Plastics Company. All rights reserved

SABIC®PC Resin PC1000R
Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
Injection Molding		
Drying Temperature	120	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	280 - 310	°C
Nozzle Temperature	270 - 290	°C
Front - Zone 3 Temperature	280 - 310	°C
Middle - Zone 2 Temperature	270 - 290	°C
Rear - Zone 1 Temperature	260 - 280	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	80 - 110	°C

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.
All properties, except the melt volume rate are measured on injection moulded samples.
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
4) Own measurement according to UL.
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

Visit www.sabicpc.com for additional information about SABIC® PC resins.


All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2012 SABIC Innovative Plastics Company. All rights reserved

SABIC®PC Resin PC1000R
Europe-Africa-Middle East: COMMERCIAL

CALCULATED FLOW LENGTH INDICATION
Moldflow® Radial Flow Analysis
SABIC PC PC1000R
Melt Temperature : 295°C
Mold Temperature : 95°C

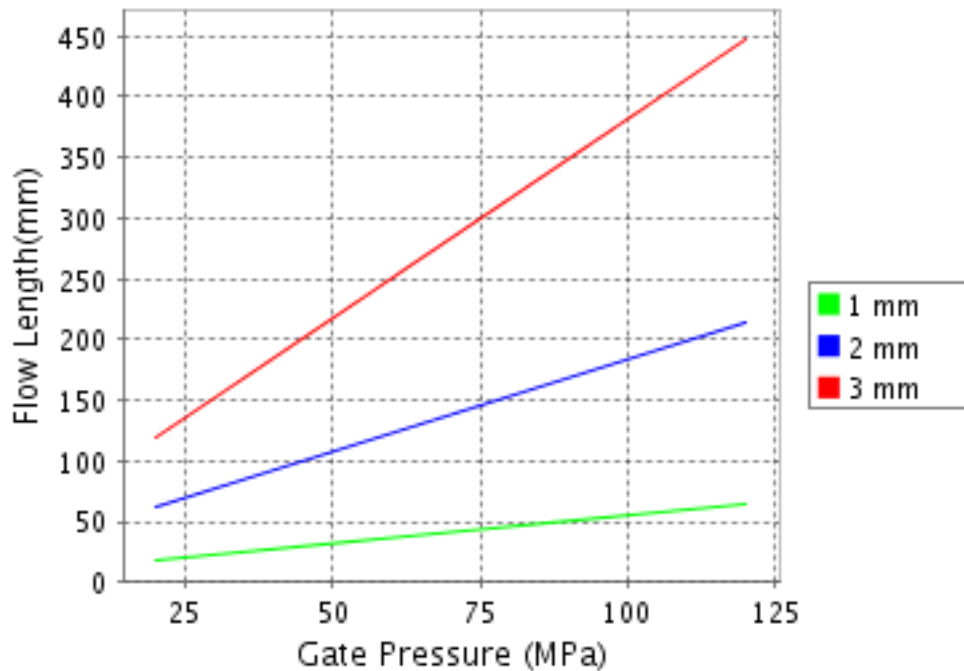

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

Moldflow is a registered trademark of the Moldflow Corporation.

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
4) Own measurement according to UL.
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

Visit www.sabicpc.com for additional information about SABIC® PC resins.

All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2012 SABIC Innovative Plastics Company. All rights reserved